


TIGERTAIL HD - Petrol & Oil

An extremely flexible suction/discharge hose with a hard wearing exposed rigid PVC spiral. Excellent chemical resistance, making the hose suitable for diesel fuels petrol, oils, sewage and chemicals.

| Barfell Product Code | Nominal in mm's | | Vacuum Rating KPa/20°C | Working Pres. @ 20°C | | Weight Kg/m | Min Bend Radius in mm | Coil Lengths in Metres |
|----------------------|-----------------|-------|------------------------|----------------------|-------|-------------|-----------------------|------------------------|
| | I.D. | O.D. | | Mpa | PS.I. | | | |
| 206045 | 44.5 | 55.5 | -80.0 | 0.3 | 45 | 0.64 | 180 | 20 |
| 206060 | 50 | 61.0 | -80.0 | 0.3 | 45 | 0.88 | 220 | 20 |
| 206065 | 63 | 76.0 | -80.0 | 0.3 | 45 | 1.27 | 270 | 20 |
| 206070 | 76 | 90.0 | -80.0 | 0.3 | 45 | 1.62 | 350 | 20 |
| 206075 | 102 | 118.0 | -80.0 | 0.3 | 45 | 2.43 | 450 | 20 |
| 206080 | 127 | 143.0 | -80.0 | 0.3 | 45 | 3.99 | 475 | 20 |
| 206085 | 150 | 167.0 | -80.0 | 0.3 | 45 | 5.10 | 500 | 20 |
| 206090 | 203 | 222.0 | -80.0 | 0.3 | 45 | 7.55 | 650 | Made to order |

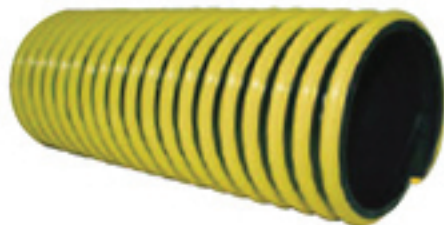

Applications Collection of waste on environmental waste trucks, pumping the contents of grease pits, sewage collection, pumping of fuels, lubricants and most chemicals.

Colour Black with Exposed Yellow Spiral
Temperature Range -5°C to +60°C

Chemical Resistance Excellent
Flexibility Excellent

Weathering Properties Good
Abrasion Resistance Excellent