

Water Suction/Airseeder Hose

PVC Suction Hose

Premium Grey Suction

"Did your grey suction hose survive the heat last summer?"

This premium quality suction hose is suitable for water and fire fighting kits. Features a heavy duty helix that ensures kink resistance. Also U.V. stabilised.



Featuring:

- The best grey suction hose in the market
- Kink-resistant in hot weather
- Heavy duty helix with full vacuum rating*
- General water & mild chemical suction applications
- Temperature operating range -20° C to +55° C
- U.V. stabilised



Also Available as Fire Suction Kits

Wall: Grey PVC
Reinforcing: White PVC Helix

- ✓ Full vacuum rated
- ✓ Airseeder applications
- ✓ Flexible and Durable

- ✓ Highest quality in the market
- ✓ -23°C to +55°C

I.D. (mm)	O.D. (mm)	Maximum W.P. (Psi)	Max. Vacuum (mm/Hg)	Coil Length (Metres)	Part Number
25	32	90	711	20	P-WSG-025-***
32	39	90	711	20	P-WSG-032-***
38	47	90	711	20	P-WSG-038-***
51	60	90	711	20	P-WSG-050-***
63	73	65	711	20	P-WSG-063-***
76	87	55	711	20	P-WSG-075-***
102	114	50	711	20	P-WSG-100-***
125	141	45	711	20	P-WSG-125-***
150	170	45	711	20	P-WSG-150-***

* Note: Full vacuum rating is at 21 deg C

PVC Hose

Rubber Hose

Lay Flat Hose

Ducting

Pneumatics

Industrial Fittings

Camlocks

Plumbing

Solvent Cement

PVC Hose

Plumb Flex Black - Pipe Sized

PVC Suction Hose

*"Flexible Pipe"*

- ✓ Pipe sized O.D. for use with Sch. 40 PVC pipe fittings
- ✓ For water pond systems
- ✓ Glue to PVC socket fittings
- ✓ Does NOT fit standard hose tail fittings

Wall: Black PVC

Reinforcing: White PVC Helix

Use WELD ON Cement



Rubber Hose

I.D. (nominal) (mm)	O.D. (mm)	Maximum W.P. (Psi)	Max. Vacuum (mm/Hg)	Coil Length (Metres)	Part Number
19	27	100	711	15.25	P-PFB-020-***
25	33.5	100	711	15.25	P-PFB-025-***
38	48	65	711	15.25	P-PFB-038-***

Lay Flat Hose



See page 84 for white "Spa-Flex"

Ducting

Pond Flex / Marine Flex

PVC Suction Hose



Inner: Smooth Black PVC
 Reinforcing: White PVC Helix
 Outer: Corrugated Black PVC

- ✓ For vent and water pond applications
- ✓ Extremely flexible
- ✓ Marine & caravan drainage

Pneumatics

I.D. (mm)	O.D. (mm)	Maximum Vacuum (mm/Hg)	Coil Length (Metres)	Part Number
19	25	350	20	P-VEN-020-***
25	32	350	20	P-VEN-025-***
28	35	350	20	P-VEN-028-***
32	39	350	20	P-VEN-032-***
38	46	350	20	P-VEN-038-***
50	59	350	20	P-VEN-050-***

Industrial Fittings

Camlocks

Marine Sanitation

PVC Suction Hose



Wall: White PVC/Nitrile blend
 Reinforcing: White PVC Helix

- ✓ Sanitation discharge hose for marine, caravan and RV's
- ✓ High nitrile content to resist odour permeation
- ✓ -5°C to +60°C

Plumbing

I.D. (mm)	O.D. (mm)	Maximum Vacuum (mm/Hg)	Coil Length (Metres)	Part Number
19	25	624	20	P-MSW-020-***
25	32	624	20	P-MSW-025-***
38	46	624	20	P-MSW-038-***

Solvent Cement

**PACIFIC
INDUSTRIAL**

2022 PRODUCT CATALOGUE

VER 2022_7


The product information provided is intended for use as a guide only.
 All specifications provided are nominal and approximate.
 Information in this product catalogue is subject to change without notice.

ACCESS

11 Lieber Grove Carrum Downs, VIC 3201. P: 03 9770 8886

Wine Hose - Spiralite® 6250

PVC Suction Hose

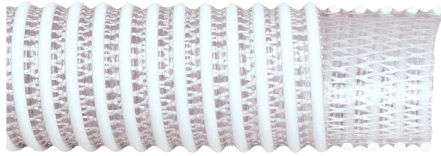

**Certified
Phthalate Free**



Inner: Smooth Clear PVC
Reinforcing: Fabric braiding
Outer: External White PVC Helix

- ✓ F.D.A. approved food grade
- ✓ Food & beverage
- ✓ Wine transfer

- ✓ Suction & Pressure
- ✓ Easy to drag
- ✓ Smooth bore

* Ask for Spiralite "Spring Sleeve" clamping helix

I.D. (mm)	O.D. (mm)	Maximum W.P. (Psi)	Max. Vacuum (mm/Hg)	Coil Length (Metres)	Part Number
51	62	100	711	30.48	P-6250-050-***
76	92	100	711	15.24/30.48	P-6250-075-***
102	120	75	711	30.48	P-6250-100-***

Wine Hose

PVC Suction Hose



Wall: Clear food grade PVC
Reinforcing: Claret PVC Helix

- ✓ Wine, spirits and food transfer
- ✓ Smooth bore
- ✓ Conforms to AS 2070

✓ -5°C to +60°C

I.D. (mm)	O.D. (mm)	Maximum W.P. (Psi)	Max. Vacuum (mm/Hg)	Coil Length (Metres)	Part Number
25	34	100	675	20	P-WSR-025-***
32	41	100	675	20	P-WSR-032-***
38	48	85	675	20	P-WSR-038-***
51	62	75	675	20	P-WSR-050-***
63	76	75	675	20	P-WSR-063-***
76	90	75	675	20	P-WSR-075-***
102	117	60	675	20	P-WSR-100-***

Milk Transfer / Wine Transfer

PVC Suction Hose



Wall: Clear Food Grade PVC
Reinforcing: White PVC Helix

- ✓ F.D.A. approved food grade
- ✓ Smooth bore
- ✓ Food, Beverage & milk

✓ -23°C to +54°C
✓ Full vacuum


I.D. (mm)	O.D. (mm)	Maximum W.P. (Psi)	Max. Vacuum (mm/Hg)	Coil Length (Metres)	Part Number
38	47	42	711	30.48	P-FSW-038-***
51	61	37	711	30.48	P-FSW-050-***
63	74	32	711	30.48	P-FSW-063-***
76	88	28	711	30.48	P-FSW-075-***

PVC Hose
Rubber Hose
Lay Flat Hose
Ducting
Pneumatics
Industrial Fittings
Camlocks
Plumbing
Solvent Cement

Helisteel Heavy Duty

PVC Suction Hose

Clear Suction with Steel Wire - F.D.A. Approved

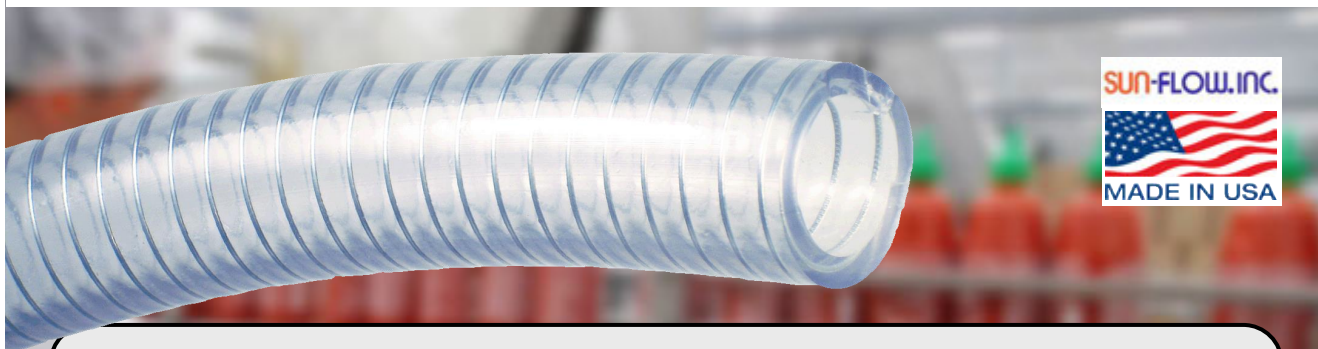

HEAVY DUTY HELISTEEL

The Sun-Flow SF-60 clear/steel wire suction is a premium quality food grade hose. Manufactured using FDA approved PVC material, the SF-60 is designed for food & beverage transfer.

Certified Phthalate Free

Featuring:

- Extra thick wall construction for tough applications
- Reinforcing steel wire for suction and pressure applications

Wall: Clear food grade PVC
Reinforcing: Steel Wire Helix

- ✓ Wine, Milk & Food transfer
- ✓ Full vacuum
- ✓ Suitable for salt water

- ✓ Excellent bending/flexing
- ✓ Mirror smooth bore
- ✓ -6°C to +65°C

I.D. (mm)	O.D. (mm)	Max. Vacuum (mm/Hg)	Maximum W.P. (Psi)	Coil Length (Metres)	Part Number
12	18	625	85	30.48	P-HSC-012-***
16	22	625	85	30.48	P-HSC-016-***
19	27	625	71	30.48	P-HSC-020-***
25	33	625	71	30.48	P-HSC-025-***
32	40	625	57	15.24	P-HSC-032-***
38	47	625	57	30.48	P-HSC-038-***
51	60	588	57	30.48	P-HSC-050-***

The following sizes are supplied by Continental



63	75	608	30	30.48	P-HSC-063-***
75	90	532	30	30.48	P-HSC-075-***
100	116	532	30	30.48	P-HSC-100-***
125	141	660	23	20	P-HSC-125-***
150	170	660	17	20	P-HSC-150-***



* Working pressures are nominal at 21°C. Working pressures reduce as the operating temperature increases

Material Handling - SPIRALITE® 6200

PVC Suction Hose



Transparent



Inner: Smooth Clear PVC
Reinforcing: Fabric braiding
Outer: External Orange PVC Helix

- ✓ Flexible & durable
- ✓ Abrasion resistant external helix
- ✓ Pressure and Suction applications

- ✓ NDD and waste water
- ✓ Light material handling
- ✓ -23°C to +54°C

I.D. (mm)	O.D. (mm)	Max. Vacuum (mm/Hg)	Maximum W.P. (Psi)	Coil Length (Metres)	Part Number
50	62	711	100	30.48	P-SPO-050-***
76	90	711	100	30.48	P-SPO-075-***
102	118	711	75	30.48	P-SPO-100-***
150	167	711	70	30.48	P-SPO-150-***
204	222	711	50	30.48	P-SPO-200-***

"Spring Sleeve" Clamping Helix



i Order one size down from hose size

Helps when clamping any corrugated hose. Use approximately 6 turns per hose end.

Hose I.D. (mm)	Spring Sleeve O.D. (mm)	Thickness (mm)	Length (cm)	Part Number
38	52	4	30cm	P-PSS-038
51	63	4.5	30cm	P-PSS-050
76	90	6	30cm	P-PSS-075
102	120	8	30cm	P-PSS-100
150	180	10.5	30cm	P-PSS-150

Tigertail

PVC Suction Hose



Quality Wins Every Time



Wall: Black PVC
Reinforcing: External Yellow PVC Helix

- ✓ Extremely flexible
- ✓ Abrasion resistant external helix
- ✓ Excellent chemical resistance

- ✓ Genuine "Tigertail"
- ✓ NDD, sewer and waste water
- ✓ -5°C to +60°C

I.D. (mm)	O.D. (mm)	Max. Vacuum (mm/Hg)	Maximum W.P. (Psi)	Coil Length (Metres)	Part Number
50	61	600	45	20	P-TTS-050-***
63	76	600	45	20	P-TTS-063-***
76	90	600	45	20	P-TTS-075-***
102	118	600	45	20	P-TTS-100-***
125	143	600	45	20	P-TTS-125-***
150	167	600	45	20	P-TTS-150-***
204	222	600	45	20	P-TTS-200-***

PVC Hose
 Rubber Hose
 Lay Flat Hose
 Ducting
 Pneumatics
 Industrial Fittings
 Camlocks
 Plumbing
 Solvent Cement

PVC Hose

Tigertail™ PE - Flexaust®

PVC Suction Hose

*"The Original"*

Rubber Hose

- ✓ Double helix for superior flexibility & durability
- ✓ Unmatched abrasion, crush and kink resistance
- ✓ Suitable for waste, septic and sullage transfer
- ✓ -40°C to +60°C

Wall: Yellow and black Polyethylene
Reinforcing: Integral Polyethylene helix

i Includes factory-installed cuffs

Lay Flat Hose

I.D. (mm)	O.D. (mm)	Max. Vacuum (mm/Hg)	Maximum W.P. (Psi)	Coil Length (Metres)	Part Number
38	n/a	736	26	10/15	P-TTF-038-***CUF
50	n/a	736	17	10/15	P-TTF-050-***CUF
76	n/a	736	12	10/15	P-TTF-075-***CUF
102	n/a	736	7	10/15	P-TTF-100-***CUF

Ducting

Blue Oil Suction

PVC Suction Hose



Pneumatics

Wall: Blue oil resistant PVC
Reinforcing: White PVC Helix

- ✓ Oil & fuel resistant
- ✓ Extremely flexible and thick-walled
- ✓ Fuel, waste, grease and sullage transfer

✓ -5°C to +60°C

Industrial Fittings

I.D. (mm)	O.D. (mm)	Max. Vacuum (mm/Hg)	Maximum W.P. (Psi)	Coil Length (Metres)	Part Number
25	34	675	100	20	P-OSB-025-***
32	41	675	100	20	P-OSB-032-***
38	48	675	85	20	P-OSB-038-***
51	62	675	75	20	P-OSB-050-***
63	76	675	75	20	P-OSB-063-***
76	90	675	75	20	P-OSB-075-***
102	117	675	60	20	P-OSB-100-***

Camlocks

Multi Purpose Suction

PVC Suction Hose



Plumbing

Wall: Black chemical resistant PVC
Reinforcing: White PVC Helix

- ✓ Oil & fuel resistant
- ✓ Extremely flexible and thick-walled
- ✓ Fuel, waste, grease and sullage transfer


✓ -5°C to +60°C

Solvent Cement

I.D. (mm)	O.D. (mm)	Max. Vacuum (mm/Hg)	Maximum W.P. (Psi)	Coil Length (Metres)	Part Number
25	34	675	100	20	P-MPS-025-***
32	41	675	100	20	P-MPS-032-***
38	48	675	85	20	P-MPS-038-***
51	62	675	75	20	P-MPS-050-***

Air Seeder

PVC Suction Hose



Wall: Clear PVC
Reinforcing: Black PVC Helix

- ✓ Highest quality in the market
- ✓ Abrasion resistant material
- ✓ Primary & secondary airseeder hose

- ✓ -23°C to +54°C
- ✓ OEM equipment

I.D. (mm)	O.D. (mm)	Max. Vacuum (mm/Hg)	Maximum W.P. (Psi)	Coil Length (Metres)	Part Number
25	33	711	90	20	P-ASB-025-***
32	39	711	90	20	P-ASB-032-***
38	46	711	90	20	P-ASB-038-***
51	60	711	70	20	P-ASB-050-***
63	74	711	65	20	P-ASB-063-***
76	87	711	55	20	P-ASB-075-***

Barflo Industrial

PVC Suction Hose



"Genuine Barflo"



Wall: Black strip-wound PVC
Reinforcing: External convolutions

- ✓ Abrasion resistant material
- ✓ Secondary & tertiary airseeder hose
- ✓ Material handling applications

- ✓ Vent duct & vacuum
- ✓ Water transfer

I.D. (mm)	O.D. (mm)	Maximum Vacuum (mm/Hg)	Coil Length (Metres)	Part Number
25	32	600	20	P-BAR-025-***
28	35.3	600	20	P-BAR-028-***
30.5	39	600	20	P-BAR-030-***
31.5	42.5	600	20	P-BAR-031-***
32	41	600	20	P-BAR-032-***
33.5	43.7	600	20	P-BAR-033-***
35	45	600	20	P-BAR-035-***
38	47.3	600	20	P-BAR-038-***
44	53.8	600	20	P-BAR-044-***
50	63.3	600	20	P-BAR-050-***



Check www.pacificindustrial.net.au for the complete Air Seeder hose range

PVC Hose

Rubber Hose

Lay Flat Hose

Ducting

Pneumatics

Industrial Fittings

Camlocks

Plumbing

Solvent Cement