



Pacific Industrial Access is an authorised re-seller of SMC

Connectors - Filtration - Directional Control Valves
Actuators - Process Control Valves - Air Dryers



Pneumatics

Industrial Fittings

Camlocks

Plumbing







Solvent Cement

Ducting

Lay Flat Hose

Rubber Hose

PVC Hose

PVC Hose	Nylon - Imperial				Nylon Tube	
						
	Wall: Single wall Nylon Reinforcement: N/A				<ul style="list-style-type: none"> ✓ Available in black (B), red (R), blue (BL), green (G), yellow (Y), natural (NT) ✓ Heat & U.V. light stablized ✓ Resists most oils, greases, brake fluids, petroleum and some chemicals <i>* When ordering colours other than black, replace "B" in part number with colour codes above.</i>	
Rubber Hose	O.D. (Inches)	Maximum W.P.		Bend Radius (In.)	Coil Length Metres	Part Number
	1/8	(Mpa)	(Psi)			
	3/16	1.7	250	0.66	100/300	T-BNI-02/16-***
	1/4	1.7	250	1	100/300	T-BNI-03/16-***
	5/16	1.7	250	1.5	100/200/300	T-BNI-04/16-***
	3/8	1.7	250	2	100/300	T-BNI-05/16-***
	1/2	1.7	250	2.5	100/200/300	T-BNI-06/16-***
	5/8	0.86	125	3.5	100/200/300	T-BNI-08/16-***
	3/4	0.86	125	5.25	50/100	T-BNI-10/16-***
				7	50/100	T-BNI-12/16-***
Ducting	Nylon - Metric				Nylon Tube	
						
	Wall: Single wall Nylon Reinforcement: N/A				<ul style="list-style-type: none"> ✓ Available in black (B), red (R), blue (BL), green (G), yellow (Y), natural (NT) ✓ Heat & U.V. light stablized ✓ Resists most oils, greases, brake fluids, petroleum and some chemicals <i>* When ordering colours other than black, replace "B" in part number with colour codes above.</i>	
Pneumatics	O.D. (mm)	Maximum W.P.		Bend Radius (mm)	Coil Length Metres	Part Number
	4	(Mpa)	(Psi)			
	5	2	290	28	100/300	T-BNM-004-***
	6	2	290	35	100/300	T-BNM-005-***
	8	2	290	42	100/300	T-BNM-006-***
	10	2	290	56	100/300	T-BNM-008-***
	12	2	290	70	100/300	T-BNM-010-***
		2	290	84	100	T-BNM-012-***
Industrial Fittings	Polyurethane - Metric				Polyurethane Tube	
						
	Wall: Single wall Polyurethane Reinforcement: N/A				<ul style="list-style-type: none"> ✓ Available in black (B), blue (BL) or natural (NT) <i>* When ordering colours other than black, replace "B" in part number with colour codes above.</i>	
Camlocks	O.D. (mm)	Maximum W.P.		Bend Radius (mm)	Coil Length Metres	Part Number
	4	(Mpa)	(Psi)			
	6	0.89	130	28	200	T-PUM-004-***
	8	0.89	130	35	100	T-PUM-006-***
	10	0.89	130	42	100	T-PUM-008-***
	12	0.89	130	56	100	T-PUM-010-***
	16	0.89	130	70	100	T-PUM-012-***
		0.89	130	84	100	T-PUM-016-***
Plumbing						
Solvent Cement						

Nylon Air Brake SAE J844 - Imperial

Nylon Tube



Type A SAE J844 - single wall
Type B SAE J844 - double wall with synthetic fibre braiding

Wall: Single/double wall Nylon
Reinforcement: Synthetic braid (Type B)

- ✓ Available in black (B), red (R), blue (BL), green (GR)
 - ✓ SAE J844
 - ✓ Resists most oils, greases, brake fluids, petroleum and some chemicals
- * When ordering colours other than black, replace "B" in part number with colour codes above*

O.D. (Inches)	Maximum W.P.		Type	Coil Length Metres	Part Number
	(Mpa)	(Psi)			
1/8	1.7	250	A	100/250	T-ABI-02/16-***
5/32	2.05	300	A	100	T-ABI-05/32-***
3/16	2.05	300	A	100	T-ABI-03/16-***
1/4	2.05	300	A	100/250	T-ABI-04/16-***
5/16	1.7	250	A	100/250	T-ABI-05/16-***
3/8	2.41	350	B	50/100/150/250	T-ABI-06/16-***
1/2	1.6	230	B	50/100/150/250	T-ABI-08/16-***
5/8	1.55	225	B	25/50/100	T-ABI-10/16-***
3/4	1.37	200	B	25/50/100	T-ABI-12/16-***

Nylon Air Brake SAE J844 - Metric

Nylon Tube



Type A SAE J844 - single wall
Type B SAE J844 - double wall with synthetic fibre braiding

Wall: Single/double wall Nylon
Reinforcement: Synthetic braid (Type B)

- ✓ Available in black (B), red (R), blue (BL)
 - ✓ SAE J844
 - ✓ Resists most oils, greases, brake fluids, petroleum and some chemicals
- * When ordering colours other than black, replace "B" in part number with colour codes above*

O.D. (mm)	Maximum W.P.		Type	Coil Length Metres	Part Number
	(Mpa)	(Psi)			
10	2.05	297	B	100	T-ABM-010-***
12	1.7	250	B	100	T-ABM-012-***

PVC Hose
 Rubber Hose
 Lay Flat Hose
 Ducting
Pneumatics
 Industrial Fittings
 Camlocks
 Plumbing
 Solvent Cement

Air Couplings - NITTO

Industrial Fittings

- ✓ Genuine Nitto
- ✓ Working Pressure up to 1.5MPa
- ✓ Working Temp -20 Deg C to +80 Deg C
- ✓ Air service only (for steel)



Size (mm)	Coupling			Adaptor		
	Male Thread	Female Thread	Hose Tail	Male Thread	Female Thread	Hose Tail
10	Q-N20SM	Q-N20SF	Q-N20SH	Q-N20PM	Q-N20PF	Q-N20PH
12	Q-N30SM	Q-N30SF	Q-N30SH	Q-N30PM	Q-N30PF	Q-N30PH
20	Q-N40SM	Q-N40SF	Q-N40SH	Q-N40PM	Q-N40PF	Q-N40PH

SMC Pneumatic Metric Tube Connectors - BSP

Industrial Fittings

- ✓ Genuine SMC fittings
- ✓ Working Pressure -100KPa to +1MPa
- ✓ Working Temp -5 Deg C to +60 Deg C (+40 Deg C for water)
- ✓ Air/Water service
- ✓ Metric Tube sizes



Tube Size (mm)	Thread Size (mm)	Dash Size (1/16")	Straight Male Connector (#3)	90 Deg Elbow Connector (#5)	Branch Tee (#12)
4	4	0402	Q-QFM3-0402	Q-QFM5-0402	Q-QFM12-0402
4	6	0404	Q-QFM3-0404	Q-QFM5-0404	Q-QFM12-0404
6	4	0602	Q-QFM3-0602	Q-QFM5-0602	Q-QFM12-0602
6	6	0604	Q-QFM3-0604	Q-QFM5-0604	Q-QFM12-0604
8	4	0802	Q-QFM3-0802	Q-QFM5-0802	Q-QFM12-0802
8	6	0804	Q-QFM3-0804	Q-QFM5-0804	Q-QFM12-0804
8	10	0806	Q-QFM3-0806	Q-QFM5-0806	Q-QFM12-0806
10	4	1002	Q-QFM3-1002	Q-QFM5-1002	Q-QFM12-1002
10	6	1004	Q-QFM3-1004	Q-QFM5-1004	Q-QFM12-1004
10	10	1006	Q-QFM3-1006	Q-QFM5-1006	Q-QFM12-1006
10	12	1008	Q-QFM3-1008	Q-QFM5-1008	Q-QFM12-1008
12	6	1204	Q-QFM3-1204	Q-QFM5-1204	Q-QFM12-1204
12	10	1206	Q-QFM3-1206	Q-QFM5-1206	Q-QFM12-1206
12	12	1208	Q-QFM3-1208	Q-QFM5-1208	Q-QFM12-1208

SMC Pneumatic Metric Tube Connectors

Industrial Fittings

- ✓ Genuine SMC fittings
- ✓ Working Pressure -100KPa to +1MPa
- ✓ Working Temp -5 Deg C to +60 Deg C (+40 Deg C for water)
- ✓ Air/Water service



Tube Size (mm)	Tube Joiner (#4)	Tube Elbow (#11)	Tube Tee (#14)
4	Q-QFM4-04	Q-QFM11-04	Q-QFM14-04
6	Q-QFM4-06	Q-QFM11-06	Q-QFM14-06
8	Q-QFM4-08	Q-QFM11-08	Q-QFM14-08
10	Q-QFM4-10	Q-QFM11-10	Q-QFM14-10
12	Q-QFM4-12	Q-QFM11-12	Q-QFM14-12

SMC Pneumatic Speed Controllers - 90 Deg

Industrial Fittings

- ✓ Genuine SMC fittings
- ✓ Working Pressure 0.1MPa to 1MPa
- ✓ Working Temp -5 Deg C to +60 Deg C
- ✓ Air service only




Tube Size (mm)	M5 Male Thread	1/8" Male BSP	1/4" Male BSP	3/8" Male BSP	1/2" Male BSP
4	Q-AS1201F-M5-04	Q-AS2201-02-04	Q-AS2201-04-04		
6	Q-AS1201F-M5-06	Q-AS2201-02-06	Q-AS2201-04-06	Q-AS3201-06-06	
8		Q-AS2201-02-08	Q-AS2201-04-08	Q-AS3201-06-08	
10			Q-AS2201-04-10	Q-AS3201-06-10	Q-AS4201-08-10
12				Q-AS3201-06-12	Q-AS4201-08-12

SMC Pneumatic Speed Controllers - In-Line BSPF

Industrial Fittings

- ✓ Genuine SMC
- ✓ Working Pressure 0.05MPa to 1MPa
- ✓ Working Temp -5 Deg C to +60 Deg C
- ✓ Air service only

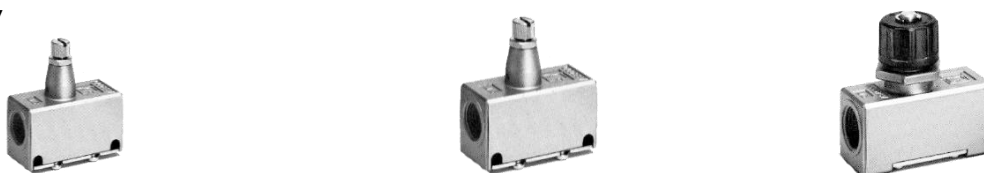

Thread Size (BSP)	1/4" Body	3/8" Body	1/2" Body
1/8	Q-AS2000-02		
1/4	Q-AS2000-04	Q-AS3000-04	Q-AS4000-04
3/8		Q-AS3000-06	Q-AS4000-06
1/2			Q-AS4000-08

PVC Hose
Rubber Hose
Lay Flat Hose
Ducting
Pneumatics
Industrial Fittings
Camlocks
Plumbing
Solvent Cement

SMC Pneumatic Exhaust Silencer

Industrial Fittings

- ✓ Genuine SMC
- ✓ Working Pressure up to 1MPa
- ✓ Working Temp +5 Deg C to +60 Deg C
- ✓ Provides noise reduction of 30 dB



Thread Size (BSP)	1/4" Body	3/8" Body	1/2" Body
1/4	Q-AN40-04		
3/8		Q-AN40-06	
1/2			Q-AN40-08

SMC Modular Filter Regulator

Industrial Fittings

- ✓ Genuine SMC
- ✓ Working Pressure up to 1MPa
- ✓ Set Pressure 0.05MPa to 0.85MPa
- ✓ Working Temp -5 Deg C to +60 Deg C
- ✓ Includes mounting bracket, auto drain and pressure gauge



Thread Size (BSP)	1/4" Body	3/8" Body
1/4	Q-AFR20-02BGA	
3/8		Q-AFR30-03BGA

- PVC Hose
- Rubber Hose
- Lay Flat Hose
- Ducting
- Pneumatics**
- Industrial Fittings
- Camlocks
- Plumbing
- Solvent Cement