

SPIRALITE 1100


PACIFIC
INDUSTRIAL
ACCESS

www.pacificindustrial.net.au

SPIRALITE 1100 heavy duty rubber material handling hose

Corrugated rubber cover for increased flexibility and reduced drag friction. Smooth tube reduces internal friction and turbulence. PVC helix, static dissipating rubber tube compound. Temperature range -1°C - +60°C.

ID (mm)	38	50	63	75	90	100	125	150	200
OD (mm)	48	61	76	90	103	118	147	175	230
Working Pressure (psi)	50	40	35	35	30	30	30	25	25
Vacuum Rating (in/HG)	28	28	28	28	28	28	28	28	28
Min Bend Radius (mm)	75	100	125	150	200	200	225	300	400
Approx Burst Pressure (psi)	150	120	105	105	90	90	80	75	75
Weight (kg / m)	.56	.80	1.15	1.56	1.86	2.50	3.57	4.73	8.53
Coil Length (mtr)	30.5	30.5	30.5	30.5	30.5	30.5	30.5	15.25	15.25

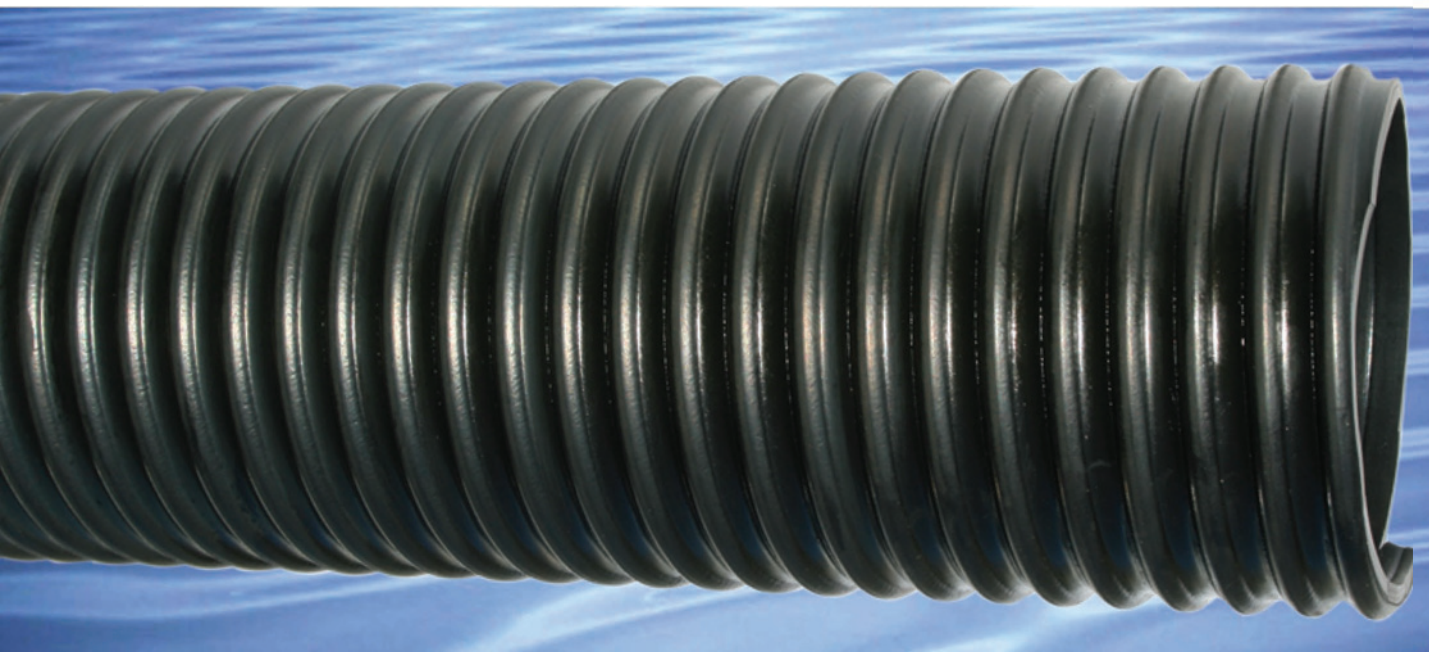

MATERIAL HANDLING



The product information provided is intended for use as a guide only. It is not intended to be used as a technical manual. All specifications provided are nominal and approximate. Information contained in this flyer is subject to change without notice.

Light weight durability and flexibility

For more information on this product contact our sales office.

e-mail: pia@pacificindustrial.net.au

www.pacificindustrial.net.au

PACIFIC
INDUSTRIAL
ACCESS

11 Lieber Grove Carrum Downs, VIC 3201. P: 03 9770 8886 F: 03 9770 8887